

# OTTOCOLL® M 550 HiTack

## The hybrid adhesive with improved formulation

Improved recipe!



- Extremely high initial adhesion
- Compatible with natural stone
- Elastic bondings
- Adheres to damp substrates

### Applications

- Bonding of different materials
- Bonding of natural stone



### Find out more about OTTOCOLL® M 550 HiTack

You can find more information about the product on our website [www.otto-chemie.com](http://www.otto-chemie.com) or in the OTTO app.

For information relating to certification marks, please see [www.otto-chemie.com](http://www.otto-chemie.com) under the heading „Information on Certification Marks“. The requirements and test criteria of the DGNB and LEED can be found on [www.dgnb.de](http://www.dgnb.de) and [www.german-gba.org](http://www.german-gba.org). Please note that these companies do not evaluate our individual products, but the sustainability as a whole of each complete building project.

The information in the present document corresponds to the status quo on going to print, refer to the index. With a new edition this edition becomes invalid. Due to the many possible influences during and after application, the customer always has to carry out trials first. Please observe the respective technical data sheet! This information is available on the Internet at [www.otto-chemie.com](http://www.otto-chemie.com). Errors and typographical errors are excepted.

**Hermann Otto GmbH**  
Krankenhausstr. 14  
83413 Fridolfing, Germany  
Tel.: +49 8684 908-0  
[info@otto-chemie.com](mailto:info@otto-chemie.com)  
[www.otto-chemie.com](http://www.otto-chemie.com)



OTTO product information

# OTTOCOLL® M 530 HiSpeed

The hybrid adhesive with very fast bonding strength

Quality creates cohesion

- Very fast bonding strength
- Handling strength bond after 20 minutes
- Functional strength bond after 3 hours
- Elastic bondings

New!


Index: 99995681-GB | 01.01.2021 | © Hermann Otto GmbH 2021



# Extremely fast...

## 1-component hybrid polymer STP adhesive

for indoor and outdoor application



### Bonding without long waiting time

OTTOCOLL® M530 HiSpeed is the solution for indoor and outdoor bonding where speed is of the essence.

Compared to two-component systems, it can be applied with a standard cartridge gun and is ideal for bonding concrete, wood, ceramics, plastics and metals.

✓ Very fast bonding strength

✓ Handling strength bond after 20 minutes

✓ Functional strength bond after 3 hours

✓ Elastic bondings



Bonding of wooden and metal stair treads ✓

Bonding of skirting and decorative mouldings ✓

Bonding of metal and plastic holders to ceramic or mineral substrates ✓

# ...and extremely powerful




Bonding of wooden and metal stair treads



Bonding of skirting and decorative mouldings

### Hybrid adhesives and their properties

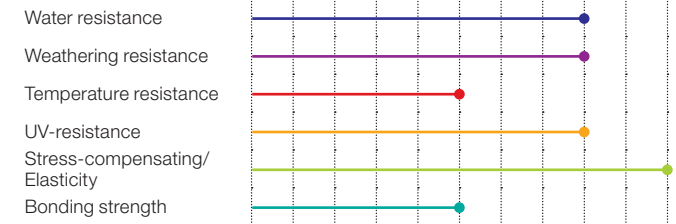

### Secure curing

Especially with diffusion-closed materials such as metal, the adhesive must be moistened to ensure complete curing and thus secure bonding.



### Find out more about OTTOCOLL® M530 HiSpeed

You can find more information about the product on our website [www.otto-chemie.com](http://www.otto-chemie.com) or in the OTTO app.

